

## 132 HALFCUT TOPCON G12R CELLS

Bifacial Glass-to-Glass design,  
Power Output Range: 600–635 Wp



### Best-in-Class Thermal Coefficients

Delivers higher efficiency even in hot climates



### Higher Yields, Lower LCOE

More commercial gains and reduced cost of energy.



### Excellent Low-Light Performance

Generates power even in weak lighting conditions.



### Outstanding PID Resistance

Protects against potential-induced degradation




### Maximum Reliability & Crack Tolerance

MBB module design ensures durability.




### Enhanced Mechanical Strength


Withstands heavy snow (5400 Pa) & wind loads (2400 Pa).

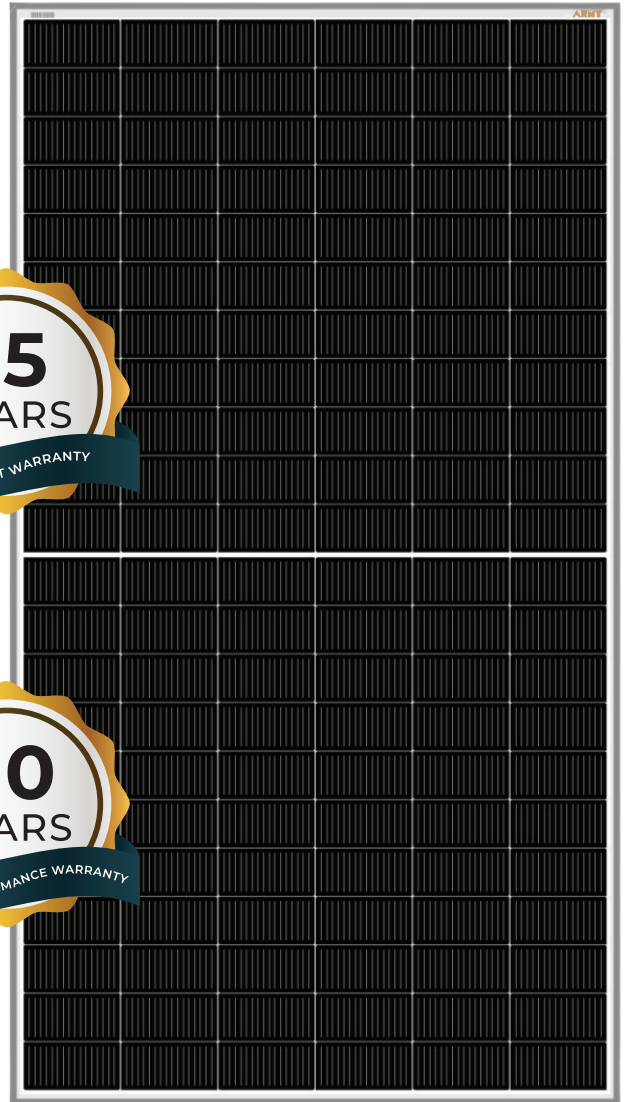


I-V VARIATION WITH IRRADIANCE

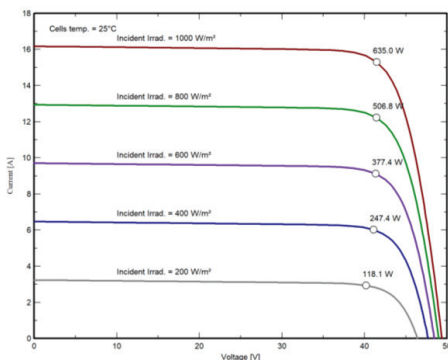

I-V VARIATION WITH TEMPERATURE

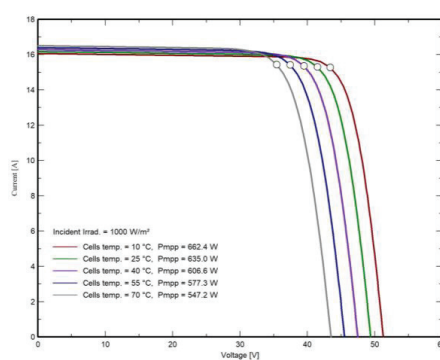

LINEAR PERFORMANCE WARRANTY

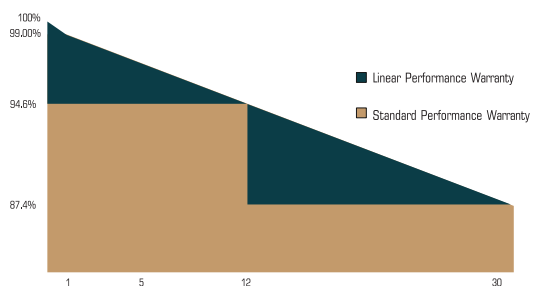

The Graphs are for reference purpose only, Please consult Army Solar technical team for further clarifications

